


# Curved Blade Register – Four Way




### DAC44D

- Four way individually adjustable curved blades on 1" spacing allows a wider spread of air to be achieved
- Opposed Blade Damper with sliding operator
- Rollformed aluminum blade installed in an extruded aluminum frame with mechanically locked corners
- Pressure fit nylon pivot pins (rattle free & non loosening)
- Countersunk screwholes c/w painted mounting screws
- Sealing gasket to prevent steaking of walls or ceiling
- Available on 2+increments as standard
- Custom sizes available but extra charge may apply
- Max blade length is 22+ Mullions used for larger sizes
- Durable powdercoat painted finish
- Available in White, Silver or Mill

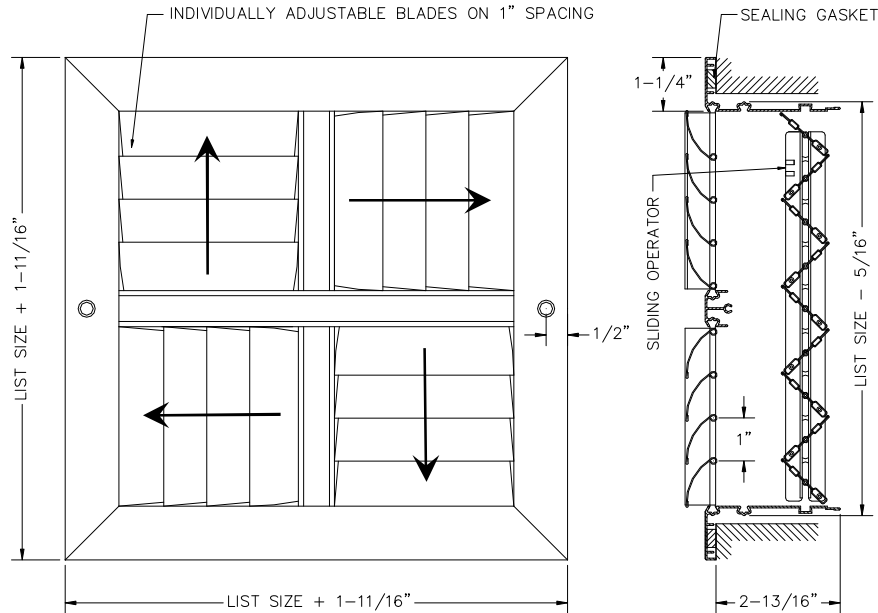

Standard blade option (shown). See following page for other options

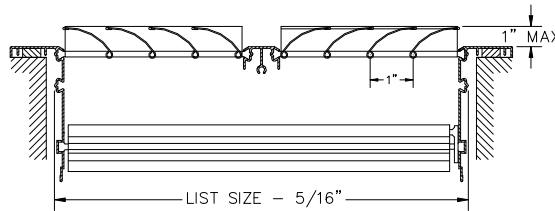

DESCRIPTION	DAC44D
FACE BLADES	Horiz/Vert Adjustable
REAR BLADES	n/a
DAMPER	Opposed Blade
MATERIAL	Aluminum
COLOR	White/Silver/Mill

JOB NAME: \_\_\_\_\_


LOCATION: \_\_\_\_\_

ARCHITECT: \_\_\_\_\_

ENGINEER: \_\_\_\_\_


CONTRACTOR: \_\_\_\_\_

# Curved Blade Register Options

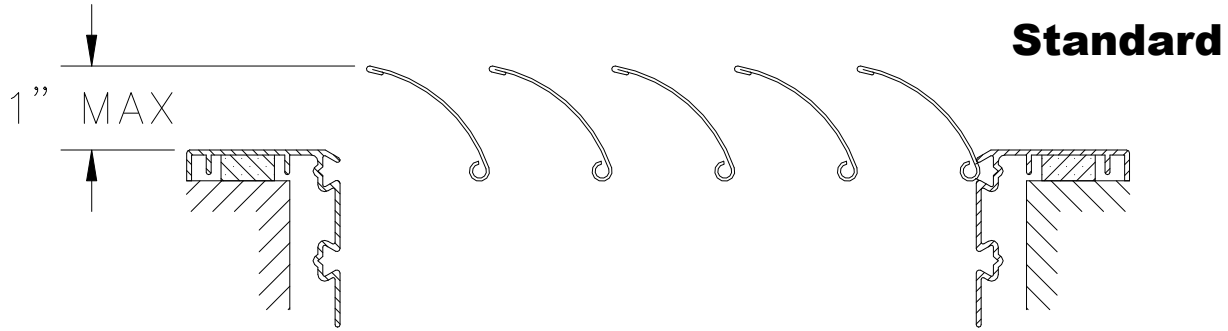

Blades on the standard blade option can extend out 1+  
Do not specify this blade option when in a location that may cause a safety concern

## **-R** **Recessed blades**

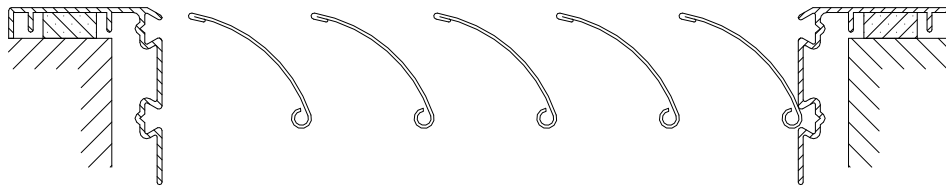

## **-F** **Fixed Blades**

