DRG Dayus Register & Grille SUBMITTAL DRAWING


Bar Linear Removable Core Grilles




Not suitable for floor use

DABLR

- Removable core held in place with clips
- Fully extruded aluminum construction for a stylish appearance
- Fixed blades designed for long straight air throw
- Sections joined together for continuous appearance. When longer than 84+, aligning pins are provided.
- End caps are included. Open ends can be specified when required.
- Available on 1/2+increments as standard
- Custom sizes available but extra charge may apply
- Durable powdercoat painted finish



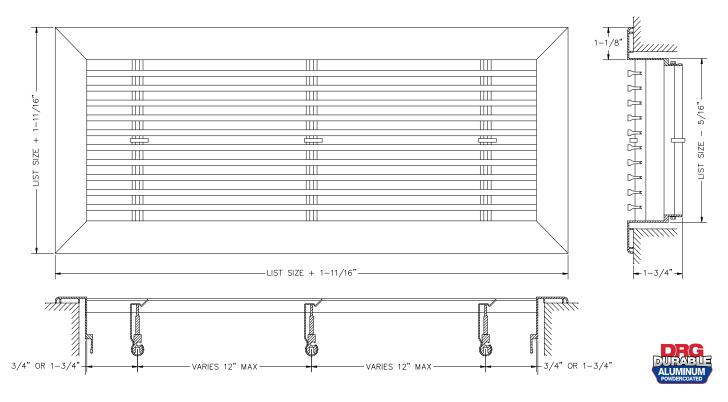

DESCRIPTION	DABLR
FACE BLADES	Horizontal Fixed
REAR BLADES	n/a
DAMPER	n/a
MATERIAL	Aluminum
COLOR	White/Silver/Brown/Mill

JOB NAME:
LOCATION:
ARCHITECT:
ENGINEER:
CONTRACTOR:

Phone: (519) 737-1199 Fax: (519) 737-1831 Email: mail@dayus.com Web: www.dayus.com




DRG Dayus Register & Grille SUBMITTAL DRAWING

Bar Linear Blade Options


-00-

0° 13/64+blades on ½+centers




-01-

0° 1/4+blades on ½+centers

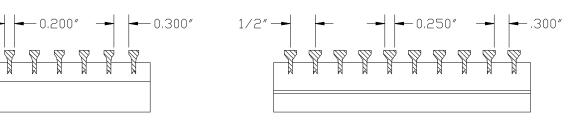


-15-

15° 13/64+blades on ½+centers




-30-


 30° 13 /₆₄+blades on $\frac{1}{2}$ +centers



-82-

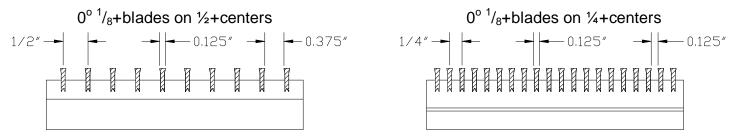

-84-



Additional charges apply for the -84 core option

Phone: (519) 737-1199 Fax: (519) 737-1831 Email: mail@dayus.com Web: www.dayus.com




Dayus Register & Grille 5290 Pullevblank St., RR#1 • Windsor, Ontario • N9A 6J3

DRG Dayus Register & Grille SUBMITTAL DRAWING

Bar Linear Mounting Options


-A SCREWS

Color matched screws with counter-sunk screwholes. Suitable for ceiling, wall, sill or floor installation.



-C CONCEALED BRACKETS

Grille gets fastened to duct-mounted brackets that are concealed behind the blades. Suitable for ceiling, wall, sill or floor installation.




-**D**

SPRING CLIPS


Clips behind the flange keep grille snug in opening and are not visible from the face. Only for floor and sill applications.

NOT suitable for wall or ceiling use.




-D SIDEWALL SCREWHOLES

Screw holes drilled at 45° on inner flange. Only available with **–R Removable core.** (Removable option not available for floor) Suitable for ceiling, wall or sill installation.



-TB NO MOUNTING OPTION

Suitable for T-Bar lay-in ceiling & custom applications. Account for the flange by ordering 2+under the T-Bar size. i.e.: a 22+x 10+grille will have a 23-11/16+x 11-11/16+OD and will fit a standard 2 ft x 1ft T-Bar opening





Dayus Register & Grille
5290 Pulleyblank St., RR#1 · Windsor, Ontario · N9A 6J3